Whirlpool Gold® GFG461LV

KEY FEATURES

- EZ-Clean, Dishwasher-Safe Satin Finish Cast-Iron, Full-Width Grates
- Two Power™ Burners with Center Burner
- AccuSimmer® Burner
- TimeSavor™ Convection Cooking System
- 5.0 cu. ft. Oven
- Precise Clean™ Cleaning System

COLORS

White(Q) Biscuit(T) Black(B) Stainless Steel(S)

Complete Product Specifications on the back. For all product accessories, please reference the Accessories section.

Freestanding Gas Range Features & Specifications

	Whirlpool Gold®
Model No.	**GFG461LV**
Capacity (cu. ft.)	5.0
Control System	Electronic
Cooktop	
Recessed Cooktop	Full Sump
Upswept, Porcelain SpillGuard™ Cooktop	Yes
Grates	Full-Width, Cast-Iron
Sealed Burners	Yes
5,000 BTU AccuSimmer® Burner	1
9,500 BTU Burner	1
15,500 BTU Power™ Burner	1
17,000 BTU Power™ Burner	1
8,000 BTU Middle Burner	1
Oven	
TimeSavor™ Convection Cooking System	Yes
AccuBake® Temperature Management System	Yes
Rapid Preheat	Yes
Broiler/Bake Burner BTU/Hr. Rating	10,000/16,500
Delay Bake	Yes
Oven Hold Warm	Yes
Custom Broil	Yes
Sabbath Mode	Yes
Control Lock	Yes
Clock and Timer	Yes
Oven Light	Automatic
Adjustable Racks	2
Oven Window	EasyView™
Drawer	Storage
Self-Cleaning System	Precise Clean™
Overall Features	
Metal Handle	S

Optional Accessories

Part #	Description
30-48KITRC	4' gas range connector install kit, kit. Includes a 48 gas connector cord.
W10163349A	LP Gas high altitude conversion kit for elevations about 6500 ft.
W10163727A	A Natural Gas high altitude conversion kit for elevations about 6500ft.

Product Dimensions

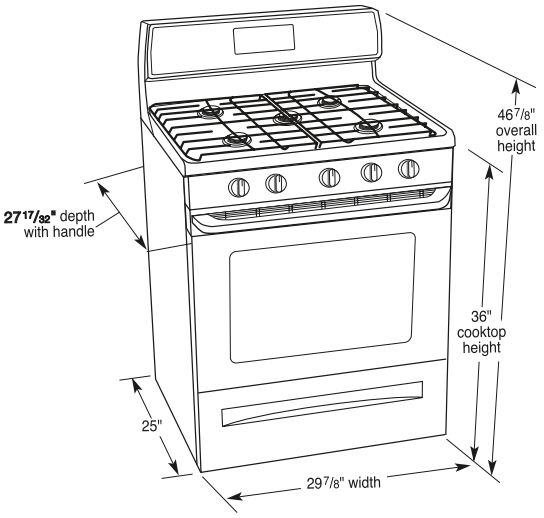

Cut-Out Dimensions

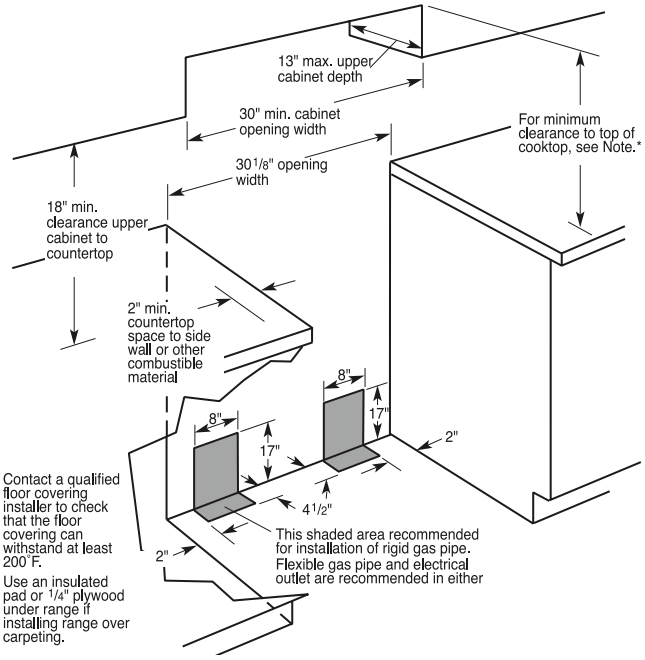
13" max. upper cabinet depth
30" min. cabinet opening width
For minimum clearance to top of cooktop, see Note.*
30 1/8" opening width
18" min. clearance upper cabinet to countertop
2" min. countertop space to side wall or other combustible material
8"
17"
8"
17"
2"
4 1/2"
2"
Contact a qualified floor covering installer to check that the floor covering can withstand at least 200°F.
Use an insulated pad or 1/4" plywood under range if installing range over carpeting.
This shaded area recommended for installation of rigid gas pipe. Flexible gas pipe and electrical outlet are recommended in either

Do not pinch the power supply cord between the range and the wall.

Do not seal range to the side cabinets.

If cabinet depth is greater than 24", oven frame must extend beyond cabinet fronts by 1/2" minimum.

* NOTE: 24" minimum when bottom of wood or metal cabinet is covered by not less than 1/4" flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" stainless steel, 0.024" aluminum or 0.020" copper.

30" minimum clearance between the top of the cooking platform and the bottom of an uncovered wood or metal cabinet.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.